

At a Glance

Applications



Pipelines

Benefits

- › Modular design
- › Variable heights
- › No welding seams


Designs

Telescopic height settings

- › 180 mm - 300 mm
- › 280 mm - 400 mm

EL-VSB 310 & -VSB 410

Variable mounting brackets

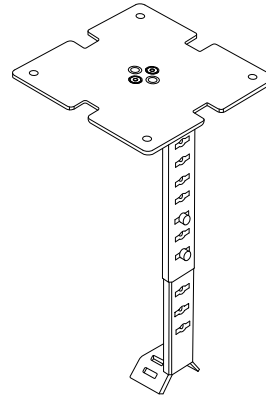

Checklist

Mounting accessories for pipelines

ELB-15.02	Hose clamp 16-25 mm (DN 15, 1/2"), Mat. 1.4301	2723001016
ELB-15.04	Hose clamp 25-40 mm (DN 25, 1"), Mat. 1.4301	2723001025
ELB-15.06	Hose clamp 40-60 mm (DN 40, 1.5"), Mat. 1.4301	2723001040
ELB-15.09	Hose clamp 70-90 mm (DN 65, 2.5"), Mat. 1.4301	2723001070
ELB-15.11	Hose clamp 90-110mm (DN 80, 3"), Mat. 1.4301	2723001090

Reinforcement Set


EL-RS	Reinforcement bracket incl. screw fitting additional stability for mounting foot and plate EL-VSB 310/410	0941088
-------	--	---------

Technical Information


Compatible housings:	Ex-TC/X-10
Mounting:	Pipeline mounting
Material:	1.4301
Base plate:	178 x 178 mm
Telescopic arm:	EL-VSB 310: 180 - 300 mm EL-VSB 410: 280 - 400 mm
Hole pattern:	154 x 152,5 mm; Ø 6,5 mm
Max. Insulation thickness:	EL-VSB310: 280 mm EL-VSB410: 380 mm
Max. Tension band width:	24 mm
Max. Tension band thickness:	5 mm
Screw set (Item No. 4094108903):	4x Cylinder head screw M6x25; V2A, DIN 912 4x Nut M6 self-locking; V2A, DIN 985

X = Alle variants

Drawing

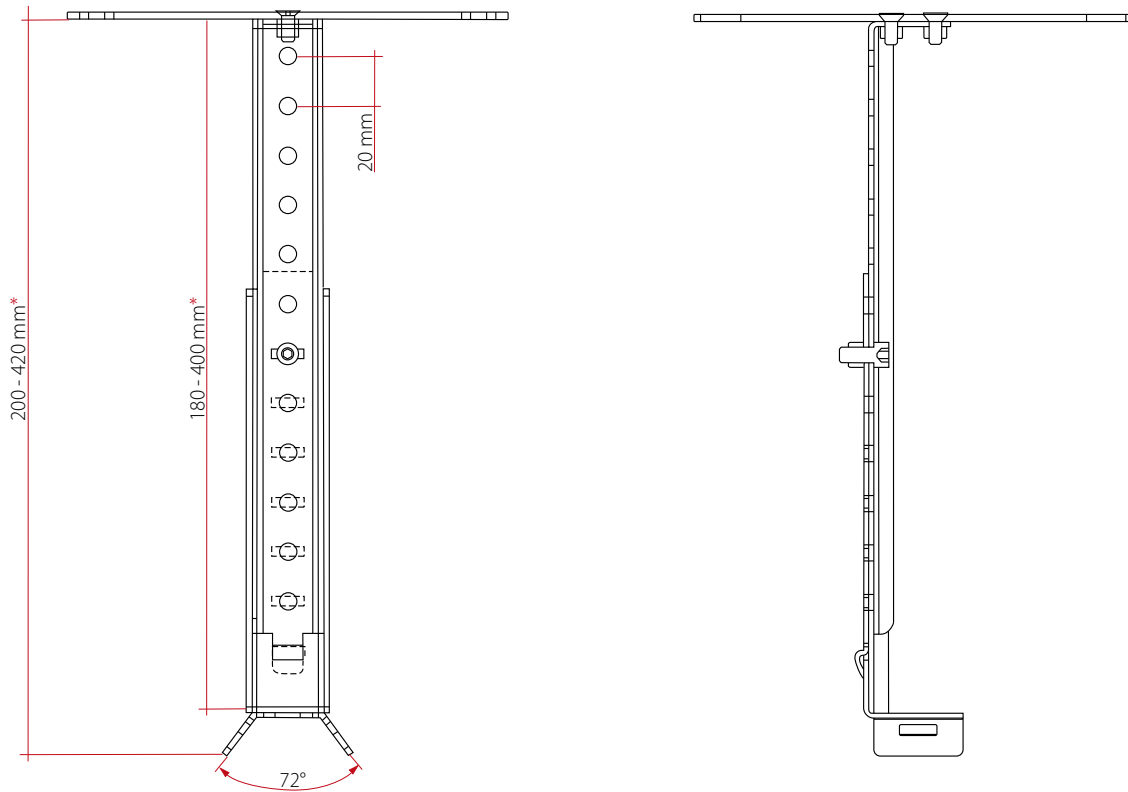

*Height adjustment varies depending on version

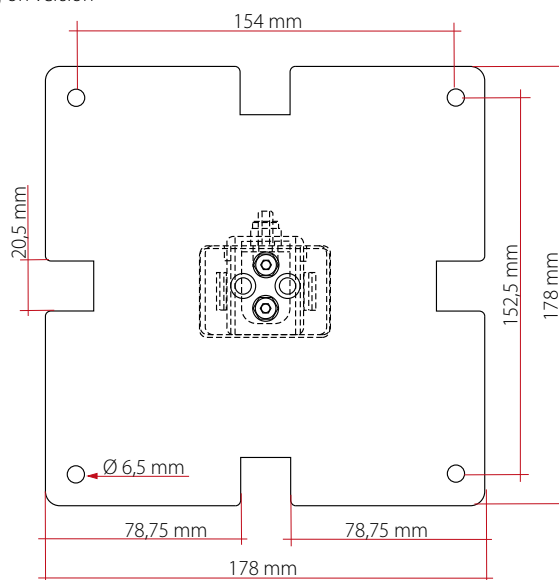

Ordering Information

Type	Description	Item No.
EL-VSB310	Variable mounting bracket EL-VSB 310 for Pipeline mounting	0941089
EL-VSB410	Variable mounting bracket EL-VSB 410 for Pipeline mounting	0941090